

KRX Hifonics Head Unit Replacement



•Tools/Parts Needed

- Push Pin Puller
- Philips Head #3 Screw Driver
- Philips Head #2 Screw Driver
- Power Drill
- Small Drill Bit
- Crimpers
- Crimping Butt Connectors
- Adjustable Wrench


- Remove driver side seat to gain access to chassis Battery.



- Once cover is removed, using the adjustable wrench loosen up and take off the red positive cable to disconnect 12V battery supply.



- Remove all 4 push pins and both lower bolt screws

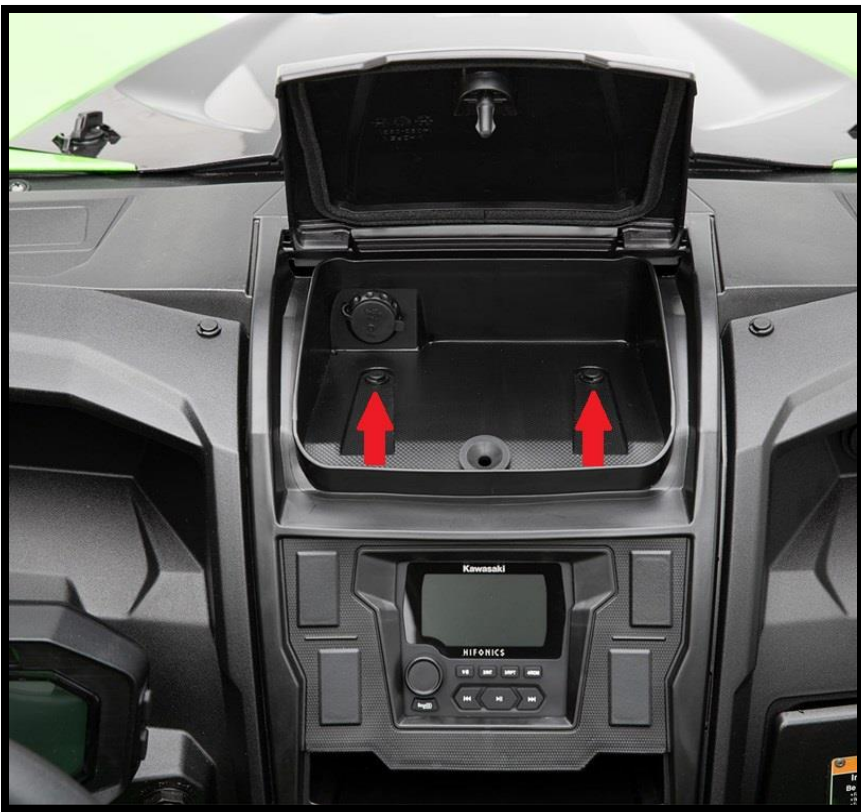


- Once removed pull center of dash to you



•Unplug all the connections from the back of the head unit




- Antenna
- USB
- Red , Blue, Black, Yellow Wires
- White Audio Connectors

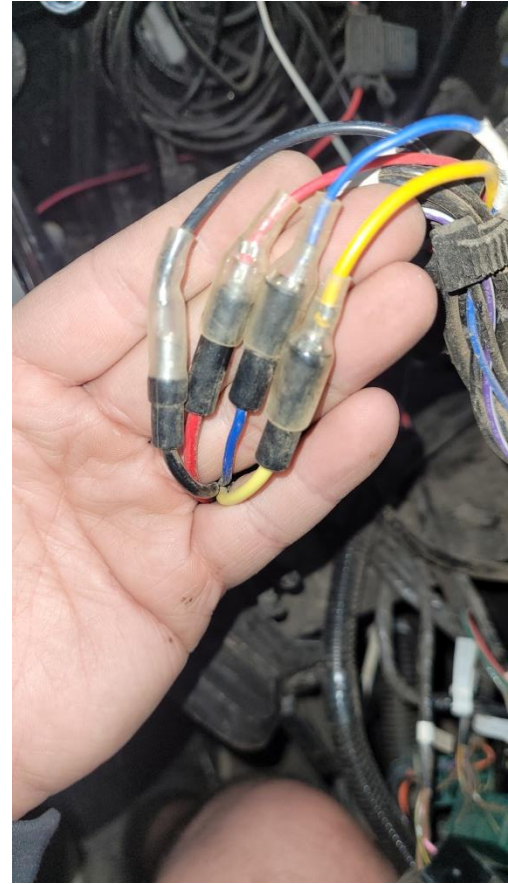


***Be careful while removing these adapters, will need a small flat head tool to push down the locking clip!!!**

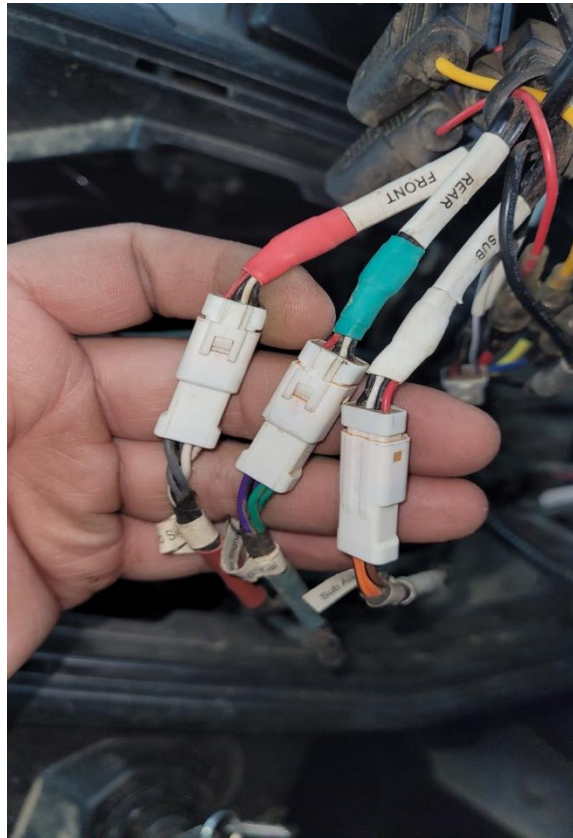

- Take out all 4 screws off the back of the head unit then remove it

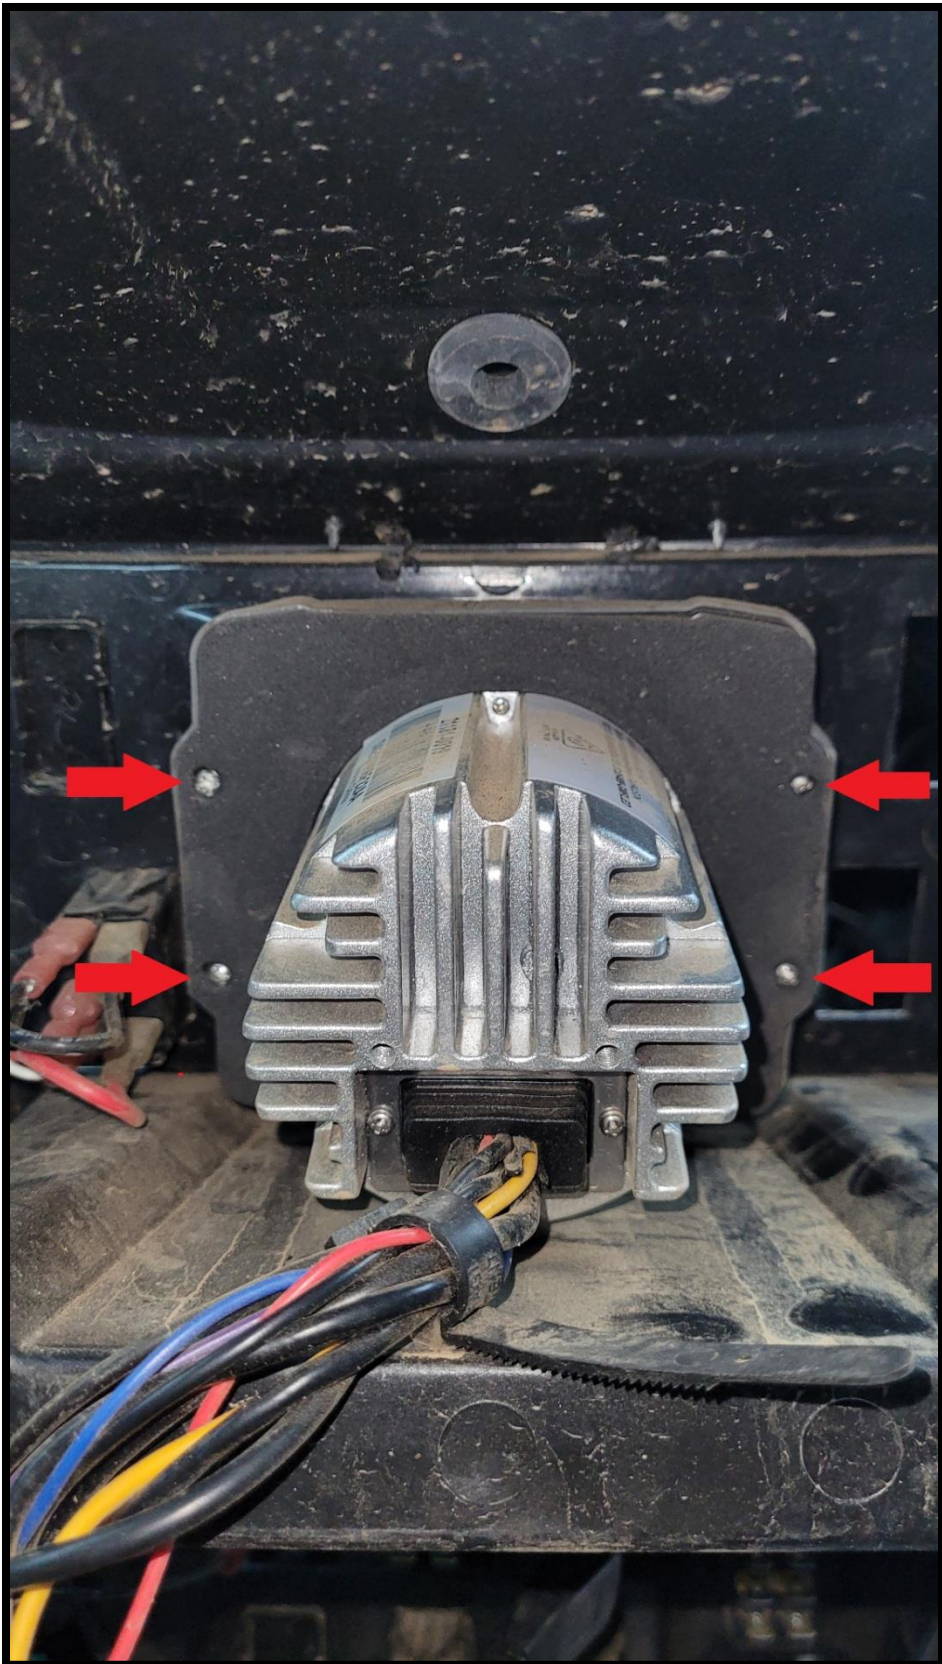

- Connect the Headunit wiring harness to the chassis harness color to color (Red, Yellow, Blue, Black)
- Also reconnect the USB & Antenna
- Won't need the other wires so disregard.

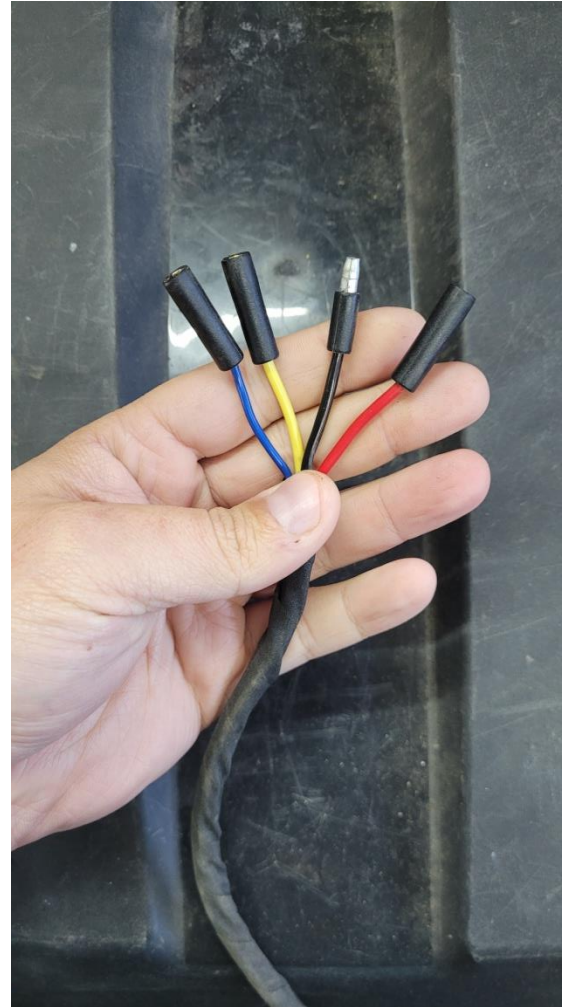

- Line up dash plate over top of stock center dash piece, pre-drill holes and use provided screws to mount custom plate to dash.
- Set head unit onto dash plate and mark mounting holes, move head unit to pre-drill holes. Then use provided screws to mount head unit to dash plate.




• Plug provided audio adapters to amplifier inputs and match up the front, rear, and subwoofer inputs to the head units RCA outputs.

(Blue RCA= White RCA & Clear RCA = Red RCA)



• Plug Headunit modular connector to the connector that is plugged into the chassis power harness.

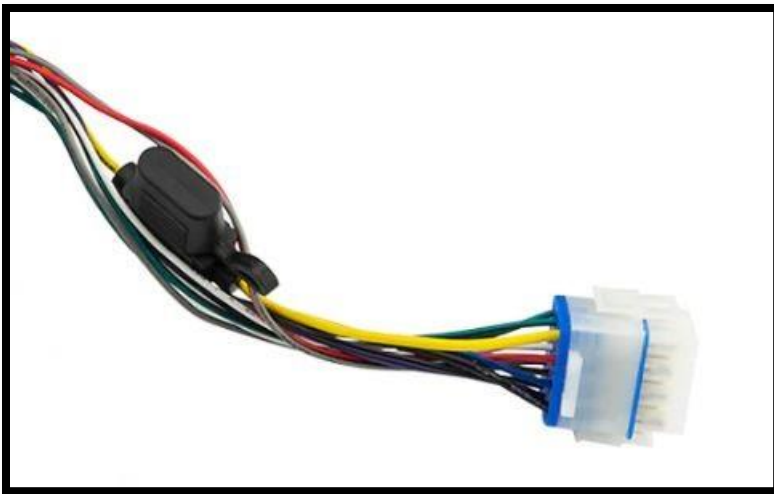

• Reinstall center dash piece as it was removed, then re-secure cable back to positive post on battery.